



Goods Lifts

Civil Dimensions


Recommended Dimensions of Goods Elevator

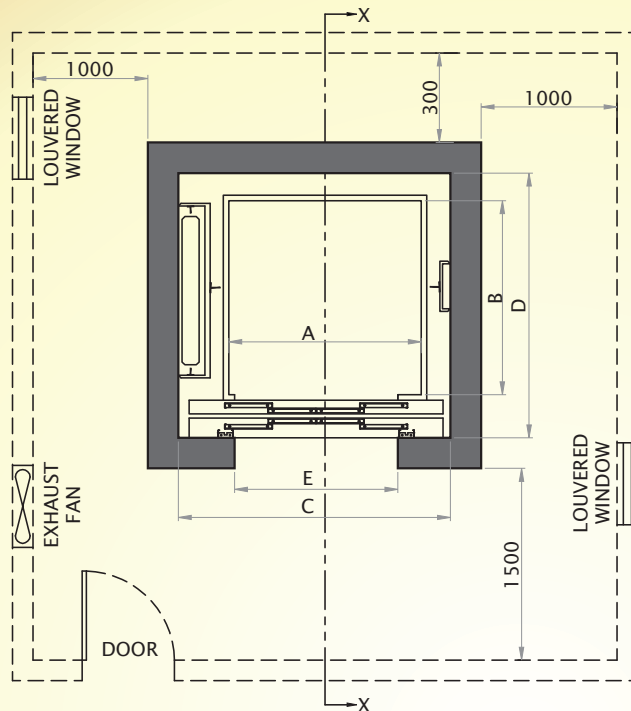

LIFT SHAFT, CAR, C.W. & MACHINE ROOM PLAN

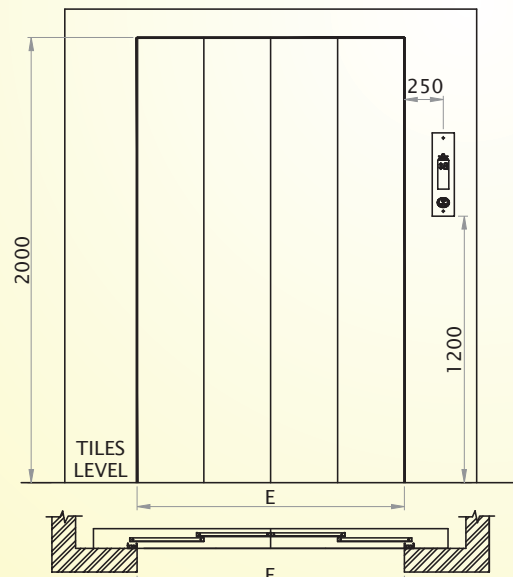

DETAILS AT DOOR OPENING

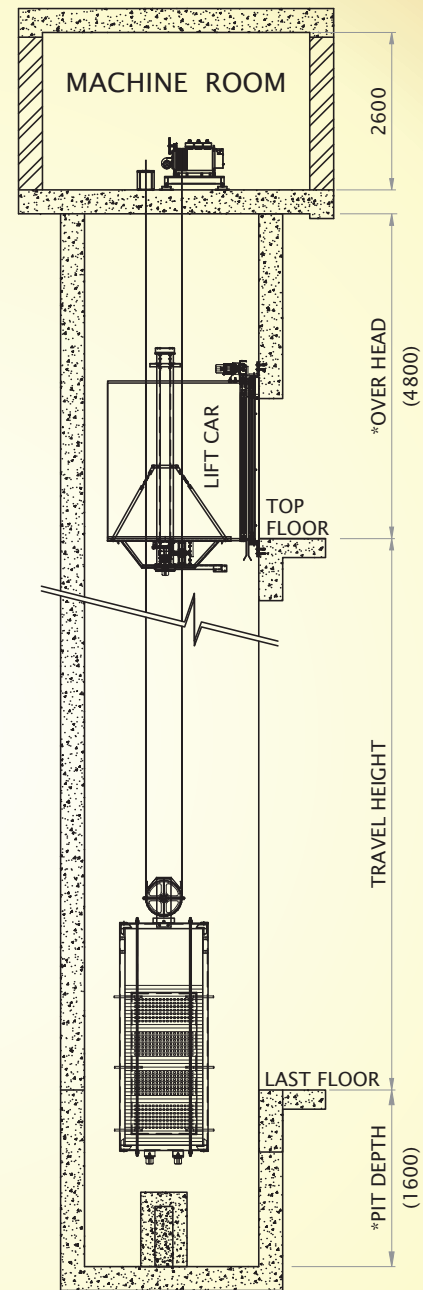

(SECTION : X-X) LIFT WELL



Load kg	Car Inside		Lift Well		Entrance
	A	B	C	D	E
500	1100	1200	2000	1650	1100
1000	1400	1800	2300	2250	1400
1500	1700	2000	2700	2450	1700
2000	1700	2500	2700	2950	1700
2500	2000	2500	3200	2950	2000
3000	2000	3000	3200	3500	2000
4000	2500	3000	3900	3500	2500
5000	2500	3600	3900	4200	2500

All dimensions in mm unless otherwise stated.

Above mentioned dimensions are suggestive only.

- Notes: 1. The Minimum Dimensions Are Shown In Above Table. Some Allowances Should Be Considered For Sloping Hoistways.
 2. When Non Standard Capacities & Dimensions Are Required, Then Consult Omega
 3. **Above 3000 Kg Lift, Machine Room Compulsory Required.**